

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

PERFECT FOR HOUSING CHILLED PRODUCTS IN MINIMAL WORK SPACES.



➤ KEY FEATURES

• **BMAD Refrigeration System**

Ensures rapid and effective cabinet cool down and maintains consistent temperature range with minimum energy consumption

• **Electronic Temperature Controller**

Assures the optimal performance of the cooler, delivering product temperature ideal for consumption.

• **High Efficiency Glass Door**

Equipped with double panel glass and low-e film to reduce condensation. Door hinge is equipped with a self-closing system to ensure the door closes safely, and returns to original position, without any damages.

• **LED Lighting System**

Our LED system uses a fraction of the energy of regular fluorescent lights and requires no replacement for up seven years.

• **CFC and HFC Free Cyclopentane Foam**

Eco-friendly, recyclable and high efficiency cabinet insulation.

• **Electronic Fan Motors**


Enhances performance and efficiency. Uses only a fraction of the energy than industry standard shaded-pole motor requires. Longer lifespan fan motor.

• **Low Maintenance Condenser**


Imbera's finless condenser designed to minimize maintenance. Drastically reduces Total Cost of Ownership. Prevents dust that blocks air flow, to save energy and extend the life of the compressor.

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.


PRODUCT VIEWS



TOP VIEW

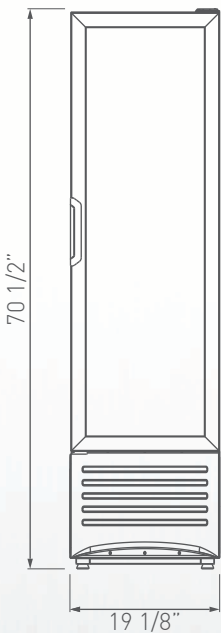

FRONT VIEW

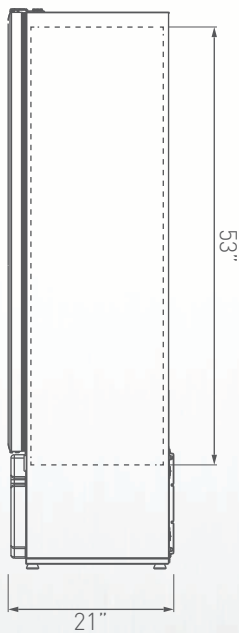

SIDE VIEW

Warranty:

Three year limited warranty on all parts and labor, an additional two year warranty on compressor. (USA and Canada only)

Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.

Customer Service: 866-363-0079 | WWW.IMBERAFOODSERVICE.COM

TECHNICAL SPECIFICATIONS

| Exterior Dimensions | W: | 19 1/8" 485 mm |
|---------------------|----|-------------------|
| | D: | 21" 533 mm |
| | H: | 70 1/2" 1792 mm |

| Interior Dimensions | W: | 15 7/8" 404 mm |
|---------------------|----|------------------|
| | D: | 16 5/8" 422 mm |
| | H: | 53" 1346 mm |

| Dimensions w/packaging | W: | 20 7/8" 531 mm |
|------------------------|----|-------------------|
| | D: | 22" 560 mm |
| | H: | 74 1/2" 1892 mm |

| Shelf Size | W: | 15 1/8" 384 mm |
|------------|----|------------------|
| | D: | 14 5/8" 371 mm |

| | | |
|---------------------------|-----------|---------|
| Weight | 163.1 Lbs | 74.0 kg |
| Weight w/packaging | 175.5 Lbs | 79.6 kg |

| | |
|----------------|---|
| Shelves | 5 |
|----------------|---|

| | |
|-----------------------|------------------|
| Capacity 20oz. | Flat: 100 |
|-----------------------|------------------|

REFRIGERATION DATA

| | |
|---------------------------|---------------|
| Energy Consumption | 1.751 kWh/day |
|---------------------------|---------------|

| | |
|----------------|--------|
| Voltage | 115/60 |
|----------------|--------|

| | |
|--------------------|-----|
| Horse Power | 1/6 |
|--------------------|-----|

| | |
|-------------|-----|
| AMPS | 3.0 |
|-------------|-----|

LOGISTIC

| | | |
|----------------------|------|----|
| Trailer Loads | 40': | 68 |
| | 53': | 72 |

| | | |
|-----------------------|---------|---|
| Certifications | UL: | ✓ |
| | ES: | ✓ |
| | UL/EPH: | ✓ |

* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

BMAD System (Low maintenance high performance).
Dimensions rounded up to the nearest inch or millimeter.
Specifications subject to change without notice.