



# VRD37 SD HC

Establishing a NEW STANDARD in the commercial refrigeration industry.

The new environmentally friendly HC double sliding door cooler with compact space and high efficiency, spark-free components that meet Coke requirements, and a combination of functionality and exceptional design.



## KEY FEATURES



### ELECTRONIC TEMPERATURE CONTROLLER

Assures the optimal performance of the cooler, delivering product temperature ideal for consumption.



### ECO-FRIENDLY NATURAL REFRIGERANT

New R290 HFC-free refrigerant gas that reduces environmental impact and increases efficiency.




### ELECTRONIC FAN MOTORS

Enhances performance and efficiency. Uses only a fraction of the energy and offers longer life expectancy than industry standard shaded-pole motors.



### HIGH EFFICIENCY GLASS DOORS

"Low-e" double panel argon gas filled glass-pack with an extruded insulated plastic frame, making this door the most energy efficient in its category.



### SLIDING DOORS

An alternative for reduced space establishments, its sliding effect keeps doors inside of the cooler cabinet. The internal springs make the doors go back up to the initial position by themselves.



### LED LIGHTING SYSTEM

All our doors come standard with a 220+ LUX of LED output, a 50% increase in brightness from our previous 150 LUX LED models, while maintaining extremely low energy consumption levels.



### CYCLOPENTANE INSULATION


CFC and HFC free Cyclopentane foam is eco-friendly and a high efficiency insulator.




COMMERCIAL REFRIGERATOR AND/OR FREEZER 9242

NSF/ANSI 7 COMMERCIAL REFRIGERATOR AND/OR FREEZER 201Y


# VRD37 SD HC



TOP VIEW

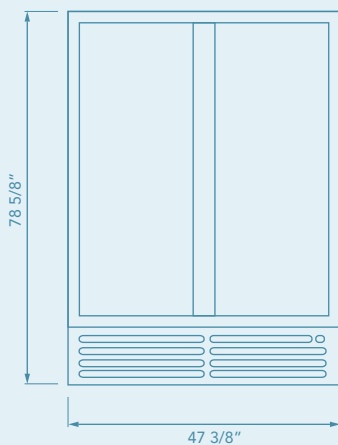

FRONT VIEW

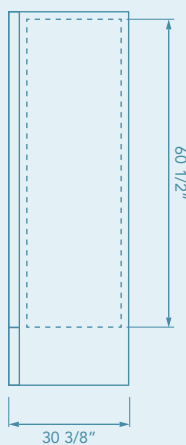

SIDE VIEW



**DANGER.** Risk of fire or explosion.  
This equipment uses highly flammable  
refrigerant HC. Do not drill pipe cooling system.

## TECHNICAL SPECIFICATIONS

<b>External Dimensions</b>	H:	78 5/8"	1997 mm
	W:	47 3/8"	1203 mm
	D:	30 3/8"	770 mm
<b>Internal Dimensions</b>	H:	60 1/2"	1537 mm
	W:	43 1/8"	1095 mm
	D:	25 3/4"	652 mm
<b>Weight</b>	Gross:	445.3 lb	202.0 kg
	Crated:	449.7 lb	204.0 kg
<b>Volume</b>		37.4 ft <sup>3</sup>	1059.6 lts
<b>Capacity</b>	53':		31
<b>Doors</b>		2	
<b>Shelves</b>		10	
<b>20 oz bottle capacity</b>	Total:		490
	Front:		7
<b>12 oz can capacity</b>	Total:		882

## REFRIGERATION DATA

<b>Energy Consumption</b> (kWh/24h)	2.995*
<b>Refrigerant R290</b> (kg)	2.99
<b>Compressor</b> (W)	1302
<b>Evaporator</b>	Dynamic
<b>Temp range</b>	32°F to 44.6°F

## ELECTRICAL DATA

<b>Amps</b> (A)	8.3
<b>Volts</b> (V)	115
<b>Frequency</b> (Hz)	60
<b>Lighting</b>	LEDs
<b>Cord Length</b>	118" 3000 mm
<b>Plug type</b>	NEMA 5-15P



### IMBERA USA L.L.C.

245 TownPark Drive Suite 145  
Kennesaw, GA 30144

[www.imberacooling.com](http://www.imberacooling.com)



\* Energy consumption based on ANSI/ASHRAE 72-2005

BMAD System (Low maintenance high performance).  
Dimensions rounded up to the nearest inch or millimeter.  
Specifications subject to change without notice.