



Intelli-Flo™



Conserve Water and Save Energy While Reducing the Chance of Cross Contamination

Introducing The Encore® Intelli-Flo™ Electronic Faucet KExx Series Wall and Deck Mount


- Compact pre-assembled control housing reduces installation time
- Everything needed to install is included in the box
- Pays for itself in five months
- Outstanding battery life - 500,000 cycles or 11.4 years
- Energy-efficient "latching" (bi-stable) solenoid only uses power to open and close
- Active infrared, no hunting for "hot spot"
- Optimized sensor angle keeps water flow on hands, less splash
- Reduces water consumption by 70%
- 20 second adjustable automatic time-out feature (complies with FDA Food Code)

Encore®
PREMIUM PLUMBING PRODUCTS

1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Tel. 800-526-3694 • 732-363-4700 • Fax 732-364-8110 • www.encoreplumbing.com

Encore® Technical Specifications for KE17/18/19 Series


KExx-1 Series Wall Mount

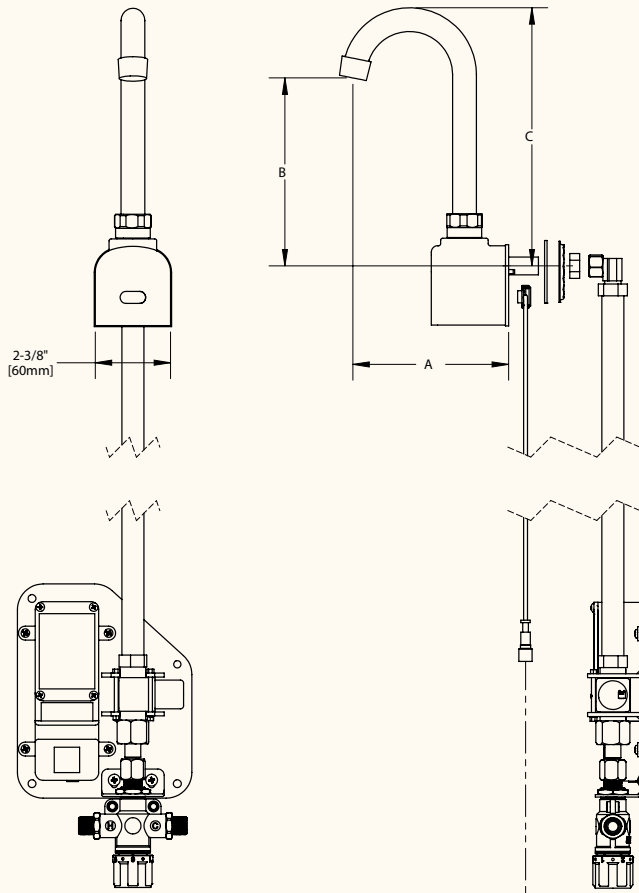

1" Mounting hole required
 3/8" Compression fitting
 Operating Temperature: 68 - 120°F
 Operating Pressure: 15 - 125psi

(2) 18" braided stainless steel supply lines included
 DC models powered with (4) 1.5V AA batteries (included)

KExx-4 Series Deck Mount

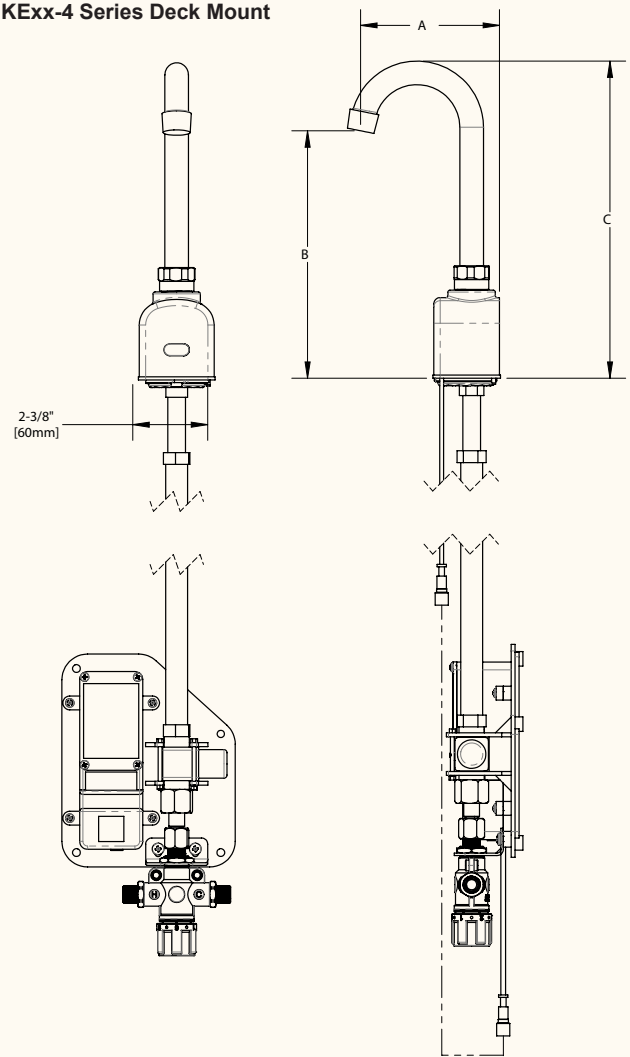

COMPLIES WITH:
 THE FEDERAL "REDUCTION OF LEAD
 IN DRINKING WATER ACT" –
 2011 – US SENATE BILL NO. S.3874
 NSF/ANSI 61/9, ANNEX G



KExx-1 Series Wall Mount

"Y" Inlet Supply	Manual Mixing Valve	Thermostatic Mixing Valve	Power	Aerator	A	B	C
KE17-1000-SC1	KE18-1000-SC1	KE19-1000-SC1	Battery	0.5GPM PCA Spray, Vandal Resistant	4-15/16" (125mm)	5-15/16" (151mm)	8-3/16" (208mm)
KE17-1100-SC1	KE18-1100-SC1	KE19-1100-SC1	AC/DC*				
KE17-1000-SB1	KE18-1000-SB1	KE19-1000-SB1	Battery	1.5GPM Laminar Flow, Antimicrobial and Vandal Resistant	4-15/16" (125mm)	5-15/16" (151mm)	8-3/16" (208mm)
KE17-1100-SB1	KE18-1100-SB1	KE19-1100-SB1	AC/DC*				

KExx-4 Series Deck Mount

"Y" Inlet Supply	Manual Mixing Valve	Thermostatic Mixing Valve	Power	Aerator	A	B	C
KE17-4000-SC1	KE18-4000-SC1	KE19-4000-SC1	Battery	0.5GPM PCA Spray, Vandal Resistant	4-3/8" (111mm)	7-7/8" (200mm)	10-1/16" (255mm)
KE17-4100-SC1	KE18-4100-SC1	KE19-4100-SC1	AC/DC*				
KE17-4000-SB1	KE18-4000-SB1	KE19-4000-SB1	Battery	1.5GPM Laminar Flow, Antimicrobial and Vandal Resistant	4-3/8" (111mm)	7-7/8" (200mm)	10-1/16" (255mm)
KE17-4100-SB1	KE18-4100-SB1	KE19-4100-SB1	AC/DC*				

*Includes 9V 800 mA UL listed adapter, US plug.