



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.encoreplumbing.com • www.componenthardware.com

PROJECT NAME: _____

LOCATION: _____

SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore® Intelli-Flo™ Wall Mount Electronic Faucet with 3" Gooseneck Faucet, 1.5 GPM Laminar Aerator and Thermostatic Mixing Valve

KE19-1100-SD1





Power supply for single faucet:
Input: 100 - 240V, 50/60Hz, 0.3amp
Output: DC 9V - 0.8amp
1 phase

Approximate shipping weight - 5 lbs
Warranty - 3 years parts

Sensor activated hands-free electronic faucet designed to minimize water consumption and reduce potential for cross contamination.

Commercial Quality Features

- Pre-assembled control housing reduces installation time
- 500,000 cycle battery life (250,000 hand washes)
- Energy-efficient "latching" (bi-stable) solenoid only uses power to open or close
- Auto-ranging feature automatically adjusts sensing range
- Thermostatic mixing valve with integral hot and cold check valves and cleanable filter
- 10' DC input power cable
- Manual auto-flush feature for sanitizing system
- Low lead compliant chrome plated brass faucet body

Hands-Free Operation

- Infra-red sensor activated
- Self-adapting sensor distance adjustment
- 1 second shut-off delay
- 20 second adjustable automatic time-out feature (complies with FDA Food Code)
- Adjustable range of action

SPECIFICATIONS:

Intelli-Flo wall mount electronic faucet to be Encore KE19-1100-SD1.

Faucet to be constructed of polished chrome plated brass with a total lead content of less than 0.25% by weighted average. Faucet to be single hole wall mount with 3" swivel gooseneck spout. Thermostatic mixing valve standard with integral cleanable filter. Sensor assembly designed to include 6V DC bi-stable solenoid powered by four (4) 1.5V AA batteries (included). AC models include 9V 800 mA UL listed adapter, US Plug. Valve components (battery compartment, sensor connector, and control module (PCB)) to be housed in sealed, non-metallic box for easy access and quick installation. (2) 3/8" braided stainless steel supply lines, 1.5 gpm laminar aerator and all necessary faucet mounting hardware.




KE19-1100-SD1

Intelli-Flo Wall Mount Electronic Faucet with Thermostatic Mixing Valve

PREMIUM PLUMBING PRODUCTS

Encore®

1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.encoreplumbing.com • www.componenthardware.com

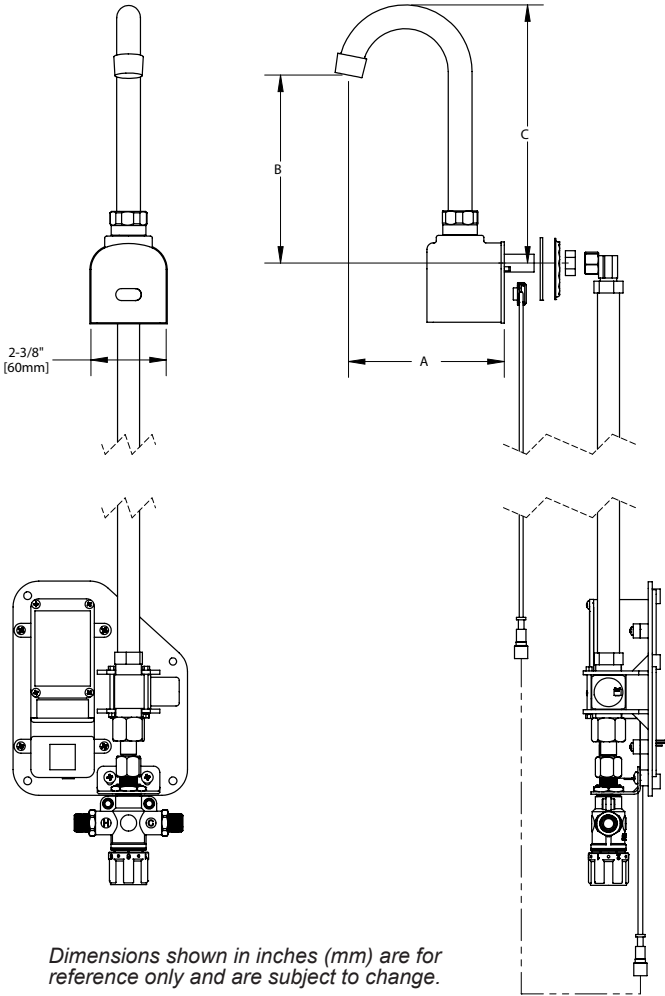

- (2) 18" braided stainless steel supply lines included
- DC models powered with (4) 1.5V AA batteries (included)
- 1" Mounting hole required
- 3/8" Compression fitting
- Operating Temperature: 68 - 120°F
- Operating Pressure: 15 - 125psi

Dimensions shown in inches (mm) are for reference only and are subject to change.

Model No.	Description	A	B	C
KE19-1100-SD1	AC/DC* Power, 3" Adjustable Gooseneck Spout, 1.5gpm Laminar Aerator	4-15/16" (125mm)	5-15/16" (151mm)	8-3/16" (208mm)

*Includes 9V 800 mA UL listed adapter, US Plug.