

Project: \_\_\_\_\_  
 Model #: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Qty: \_\_\_\_\_  
 Approval: \_\_\_\_\_

460 Southport Commerce Blvd.  
 Spartanburg SC 29306  
 Phone: 864-574-6004  
 Toll Free: 1-888-532-2816  
 sales@ojedausainc.com  
 service@ojedausainc.com  
 www.ojedausa.com



# COUNTERTOP COOLER

# CTRH-4



Custom Graphics  
 Available Upon Request

## R-290 REFRIGERANT

Equipped with R-290 refrigerant, an eco-friendly alternative that meets the EPA's environmental impact regulations.

## STEEL CONSTRUCTION

Robust steel construction minimizes the use of plastic materials resulting in an environmentally friendly design.

## ELECTRONIC CONTROL

The intelligent temperature control is programmed to ensure the correct operation of the equipment.

## LED LIGHTING

LED provides long lasting energy efficient lighting with minimal heat output.

## REVERSIBLE DOOR

Equipped standard with a reversible door, adding flexibility to the placement in the store.

## HOT GAS EVAPORATION

Hot gas heated drain pan for condensate evaporation that reduces the need of floor drains or electric heaters.

## OPERATION TEMPERATURE

Medium Temp: 34°F to 40°F.

Dimensions			Shelves	HP	Voltage	NEMA Config	Amps	Crated Weight	Refrigerant
W	D	H							
23.4"	27.5"	31.5"	2	1/7	120	5-15P	3.5	185 lbs	R-290
595 mm	699 mm	800 mm	Net Capacity (cf): 4		Energy Consumption: 1.32 kWh/24 h				

\*Inches rounded up one decimal place. \*Specifics may change without notification.



FAMILY OWNED SINCE 1948  
 PROUDLY MANUFACTURED  
 IN NORTH AMERICA

# COUNTERTOP COOLER

# CTRH-4

## CABINET CONSTRUCTION

- High-density, CFC-Free, polyurethane insulation.
- Exterior: Galvanized metal cabinet with powder coated painted surface.
- Interior: Easy to clean pre-painted steel.
- Stainless steel leveling legs.

## DOOR

- One (1) Double pane glass door assembly.
- Self closing door.
- Recessed pocket handle.
- Magnetic door gasket.
- Reversible door.

## LIGHTING

- LED interior lighting mounted on the door.

## OPERATING CONDITIONS

- The unit is best suited for an environment where temperatures remain below 85 °F and humidity does not exceed 55%.
- Areas with direct sunlight should also be avoided.

## SHELVING

- 2 adjustable, white powder-coated wired shelves.
- Dimensions per shelf:
  - Top Shelf 20.1" W x 16.2" D.
  - Bottom shelf 20.1" W x 8.4" D.

## ELECTRICAL

- 110/120 standard volt system.



5-15P PLUG

## REFRIGERATION

- R-290 refrigerant.
- Electronic temperature control.
- Easy to reach components for maintenance.

## ACCESSORIES

- Optional attachable lock with key.
- Stainless steel legs.
- Custom Graphics.

## OPTIONAL ACCESSORIES


### LEVELING LEGS



### OPTIONAL LOCK WITH KEY



## DIMENSIONAL DRAWING

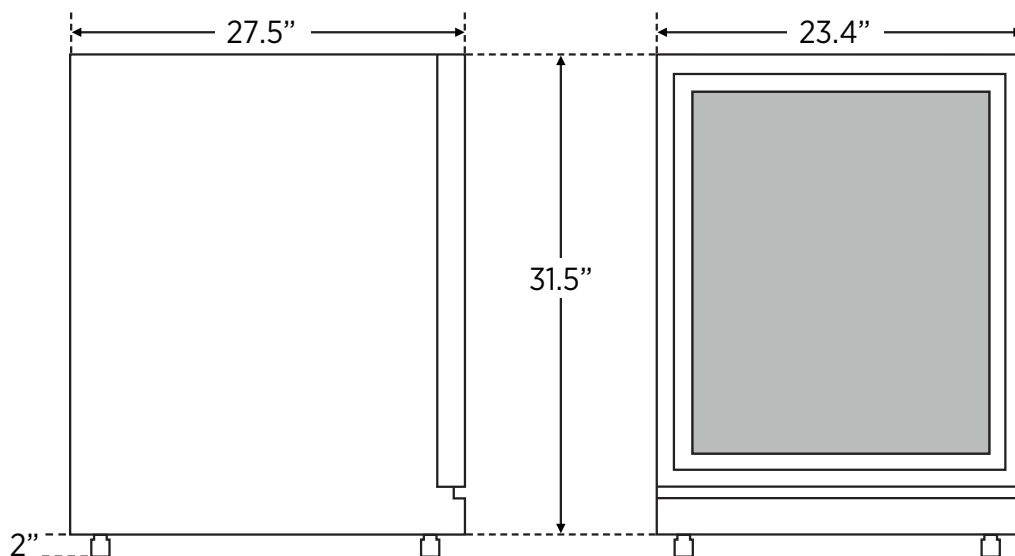

\*INCHES ROUNDED UP ONE DECIMAL PLACE \*SPECIFICS MAY CHANGE WITHOUT NOTIFICATION



[www.ojedausa.com](http://www.ojedausa.com)