

Project: \_\_\_\_\_  
 Model #: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Qty: \_\_\_\_\_  
 Approval: \_\_\_\_\_

460 Southport Commerce Blvd.  
 Spartanburg SC 29306  
 Phone: 864-574-6004  
 Toll Free: 1-888-532-2816  
 sales@ojedausainc.com  
 service@ojedausainc.com  
 www.ojedausa.com



BUNKER FREEZER

NBH-68



Custom Graphics  
 Available Upon Request

### R-290 REFRIGERANT

Equipped with R-290 refrigerant, an eco-friendly alternative that meets the EPA's environmental impact regulations.

### STEEL CONSTRUCTION

Robust steel construction minimizes the use of plastic materials resulting in an environmentally friendly design.

### SLIDING LIDS

Low-E tempered sliding glass lids reflect light and reduce the heat load inside the cabinets. Each unit comes with a lock and keys for added security.

### HIGH IMPACT ABS FRAME

Made of a high impact durable plastic, this frame assures a long-term life span.

### ADJUSTABLE THERMOSTAT

Freezers are equipped with a mechanical thermostat that allows the users to adjust temperature that best fits their products needs. Set from factory at -4°F.

### INTERNAL LED LIGHTING

LED lighting in our bunker freezers ensures products are beautifully illuminated, enhancing visibility and creating an appealing display for customers.

### CASTERS

Equipped with casters that allow easy and fast movement in the store.

### TOP LIGHT BAR

Optional top light bar for custom graphics.

### OPERATION TEMPERATURE

Low temp: -10°F to 0°F.

Dimensions			Baskets	HP	Voltage	NEMA Config	Amps	Crated Weight	Refrigerant
W	D	H							
68.4"	26.4"	34.3"	7	1/4+	120	5-15P	4	380 lbs	R-290
1738 mm	671 mm	872 mm	Net Capacity (cf): 19		Energy Consumption: 2.82 kWh/24 hrs				

\*Inches rounded up one decimal place. \*Specifics may change without notification.

# BUNKER FREEZER

# NBH-68

## CABINET CONSTRUCTION

- High-density, CFC-Free, polyurethane insulation.
- High impact ABS top frame.
- Exterior: white galvanized metal cabinet with powder coated painted surface.
- Interior: white easy to clean pre-painted steel.
- Rated for Ice Cream.

## Lids

- Removable Low-E tempered sliding glass lids.
- Includes Lock and set of keys.

## Baskets

- 7 removable baskets.
- Basket Dimension 8.6" W x 21.7" D x 20.3" H.

## OPERATING CONDITIONS

- The unit is best suited for an environment where temperatures remain below 75°F and humidity does not exceed 55%.
- Areas with direct sunlight should be avoided.

## ELECTRICAL

- 110/120 standard volt system.



## LIGHTING

- LED interior lighting.

## REFRIGERATION

- R-290 refrigerant.
- Cold wall refrigeration system.
- Mechanical thermostat.
- Easy to reach components for maintenance.

## ACCESSORIES

- Two ring tub holders.
- Dip well.
- Top light bar.
- Custom Graphics.

## OPTIONAL ACCESSORIES


### DIP WELL



### 2 RING TUB HOLDERS



## DIMENSIONAL DRAWING

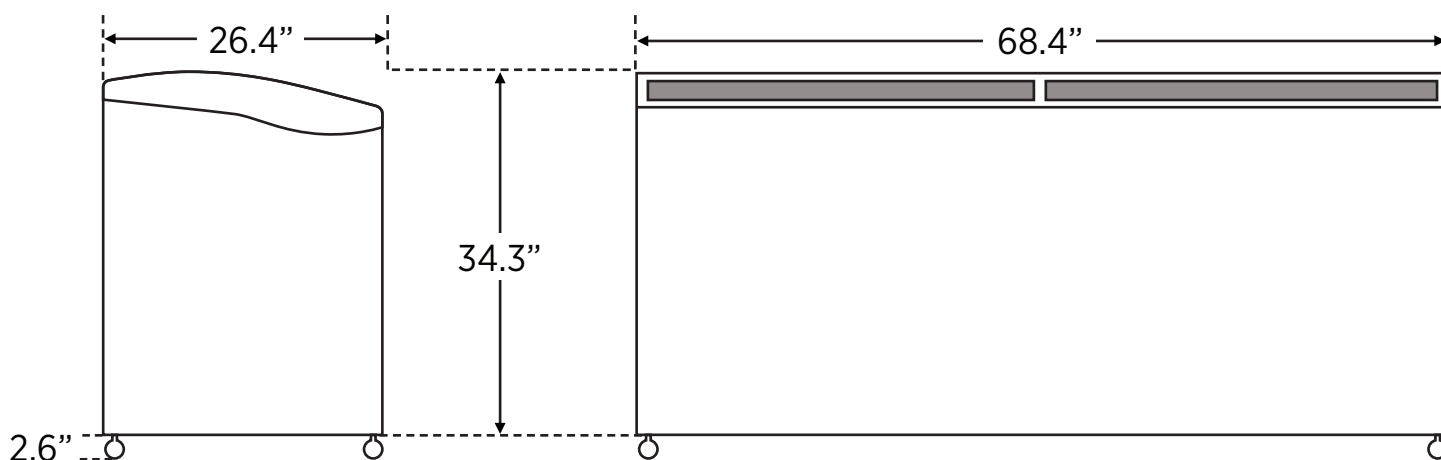

\*Inches rounded up one decimal place. \*Specifics may change without notification.



[www.ojedausa.com](http://www.ojedausa.com)