| Project: | |
|-----------|------|
| Model #: | |
| Item #: | Qty: |
| Approval: | |

460 Southport Commerce Blvd. Spartanburg SC 29306 Phone: 864-574-6004 Toll Free: 1-888-532-2816

sales@ojedausainc.com service@ojedausainc.com www.ojedausa.com



REFRIGERATED MERCHANDISING SOLUTIONS

REFRIGERATED DELI CASE

RDCH-3



Custom Graphics Available Upon Request

CARE FREE CONDENSER

The finless spiral condenser design prevents dust/dirt buildup allowing maximum long term efficiency.

R-290 REFRIGERANT

Equipped with R-290 refrigerant, an eco-friendly alternative that meets the EPA's environmental impact regulations.

STEEL CONSTRUCTION

Robust steel construction minimalizes the use of plastic materials resulting in an environmentally friendly design.

120 VOLT SYSTEM

All RDCH models feature a 110/120 Volt system standard, ensuring hassle-free plug and play for our customers.

ELECTRONIC CONTROL

The intelligent temperature control is programmed to ensure the correct operation of the equipment.

LED LIGHTING

LED lighting in our deli cases is designed to elevate your display with long-lasting, energy-efficient illumination.

HOT GAS EVAPORATION

Hot gas heated drain pan for condensate evaporation that reduces the need of floor drains or electric heaters.

NON-REFRIGERATED OPTION

The new RDCH line offers the flexibility to convert into a dry case, allowing it to adapt perfectly to your specific needs.

OPERATION TEMPERATURE

Medium Temp: 34°F to 40°F.

| Dimensions | | Levels | НР | Voltage | NEMA | Amps | Crated | Refrigerant | |
|------------|--------|---------|-----------|---------------|-----------------------------------|--------|--------|-------------|-----------|
| W | D | Н | Levels | | Voltage | Config | Allips | Weight | Remgerant |
| 37.3" | 33.7" | 50.1" | 2 | 1/6 | 120 | 5-15P | 4 | 414 lbs | R-290 |
| 948 mm | 856 mm | 1273 mm | Net Capac | rity (cf): 10 | Energy Consumption: 4.09 kWh/24 h | | | | 1 230 |

*Inches rounded up one decimal place. *Specifics may change without notification.











REFRIGERATED DELI CASE

CABINET CONSTRUCTION

- •High-density, CFC-Free, polyurethane insulation.
- Curved glass.
- •Exterior: Galvanized metal cabinet with powder coated painted surface.
- •Interior: Easy to clean pre-painted steel.
- •Stainless steel bottom.
- •Built-in power outlet for scale.
- •Non-refrigerated variant with integrated switch.
- •Rated for open food.

DOOR

•Removable sliding glass doors.

SHELVING

- •Dimensions per level: 31.3" W x 15" D.
- •2 adjustable, black powder-coated wired shelves.

OPERATING CONDITIONS

- •The unit is best suited for an environment where temperatures remain below 75°F and humidity does not exceed 55%.
- Areas with direct sunlight should be avoided.

ELECTRICAL

•110/120 standard volt system.



LIGHTING

•LED interior lighting.

REFRIGERATION

- •R-290 refrigerant.
- Maintenance free condenser.
- •Hot gas heated condensation pan.
- •Electronic temperature control.
- •Reverse cycle defrost system.
- •Easy to reach components for maintenance.

ACCESSORIES

- Cutting board top.
- •3" or 5" casters (4 required).
- •6" stainless steel legs.
- Custom graphics.

OPTIONAL ACCESSORIES

3"/5" CASTERS

6" STAINLESS STEEL LEGS












DIMENSIONAL DRAWING

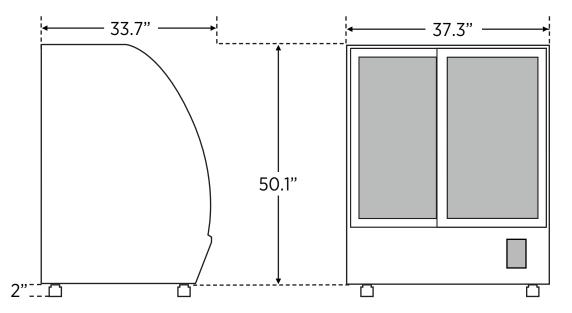

^{*}Inches rounded up one decimal place. *Specifics may change without notification.











