Project:	
Model #:	
Item #:	Qty:
Approval:	

460 Southport Commerce Blvd. Spartanburg SC 29306 Phone: 864-574-6004 Toll Free: 1-888-532-2816

sales@ojedausainc.com service@ojedausainc.com www.ojedausa.com



REFRIGERATED MERCHANDISING SOLUTIONS

REFRIGERATED DELI CASE

RDCH-5



Custom Graphics Available Upon Request

CARE FREE CONDENSER

The finless spiral condenser design prevents dust/dirt buildup allowing maximum long term efficiency.

R-290 REFRIGERANT

Equipped with R-290 refrigerant, an eco-friendly alternative that meets the EPA's environmental impact regulations.

STEEL CONSTRUCTION

Robust steel construction minimalizes the use of plastic materials resulting in an environmentally friendly design.

120 VOLT SYSTEM

All RDCH models feature a 110/120 Volt system standard, ensuring hassle-free plug and play for our customers.

ELECTRONIC CONTROL

The intelligent temperature control is programmed to ensure the correct operation of the equipment.

LED LIGHTING

LED lighting in our deli cases is designed to elevate your display with long-lasting, energy-efficient illumination.

HOT GAS EVAPORATION

Hot gas heated drain pan for condensate evaporation that reduces the need of floor drains or electric heaters.

NON-REFRIGERATED OPTION

The new RDCH line offers the flexibility to convert into a dry case, allowing it to adapt perfectly to your specific needs.

OPERATION TEMPERATURE

Medium Temp: 34°F to 40°F.

Dimensions		Levels	HP	Voltage	NEMA	Amps	Crated	Refrigerant		
W	D	Н	Levels		Voltage	Config	Amps	Weight	Kenngerunt	
60.3"	33.7"	50.1"	2	1/4+	120	5-15P	5	591 lbs	R-290	
1532 mm	856 mm	1273 mm	Net Capacity (cf): 17 Energy			gy Consumption: 5.68 kWh/24 h			1 230	

*Inches rounded up one decimal place. *Specifics may change without notification.



FAMILY OWNED SINCE 1948 PROUDLY MANUFATURED IN NORTH AMERICA

REFRIGERATED DELI CASE

RDCH-5

CABINET CONSTRUCTION

- •High-density, CFC-Free, polyurethane insulation.
- •Curved glass.
- Exterior: Galvanized metal cabinet with powder coated painted surface.
 Interior: Easy to clean pre-painted steel.
- •Stainless steel bottom.
- •Built-in power outlet for scale.
- •Non-refrigerated variant with integrated switch.
- •Rated for open food.

DOOR

•Removable sliding glass doors.

SHELVING

- •Dimensions per level: 54.3" W x 15" D.
- •6 adjustable, black powder-coated wired shelves.

OPTIONAL ACCESSORIES

3"/5" CASTERS

6" STAINLESS STEEL LEGS

avoided.

ELECTRICAL


•LED interior lighting.

LIGHTING





DIMENSIONAL DRAWING

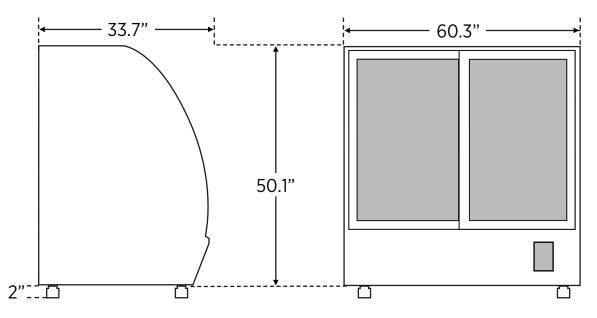

ANAFEM

MAES

OPERATING CONDITIONS

and humidity does not exceed 55%.

•Areas with direct sunlight should be


•110/120 standard volt system.

•The unit is best suited for an environment

where temperatures remain below 75°F

5-15P PLUG

*Inches rounded up one decimal place. *Specifics may change without notification.



Maintenance free condenser.
Hot gas heated condensation pan.
Electronic temperature control.
Reverse cycle defrost system.
Easy to reach components for

REFRIGERATION

ACCESSORIES

maintenance.

Cutting board top.
3" or 5" casters (6 required).
6" stainless steel legs.
Custom graphics.

