Project:	
Model #:	
Item #:	Qty:
Approval:	

460 Southport Commerce Blvd. Spartanburg SC 29306 Phone: 864-574-6004 Toll Free: 1-888-532-2816

sales@ojedausainc.com service@ojedausainc.com www.ojedausa.com



REFRIGERATED MERCHANDISING SOLUTIONS

**RDCH-6** 

## **REFRIGERATED DELI CASE**



#### Custom Graphics Available Upon Request

#### **CARE FREE CONDENSER**

The finless spiral condenser design prevents dust/dirt buildup allowing maximum long term efficiency.

#### **R-290 REFRIGERANT**

Equipped with R-290 refrigerant, an eco-friendly alternative that meets the EPA's environmental impact regulations.

#### **STEEL CONSTRUCTION**

Robust steel construction minimalizes the use of plastic materials resulting in an environmentally friendly design.

#### **120 VOLT SYSTEM**

All RDCH models feature a 110/120 Volt system standard, ensuring hassle-free plug and play for our customers.

#### **ELECTRONIC CONTROL**

The intelligent temperature control is programmed to ensure the correct operation of the equipment.

#### LED LIGHTING

LED lighting in our deli cases is designed to elevate your display with long-lasting, energy-efficient illumination.

#### **HOT GAS EVAPORATION**

Hot gas heated drain pan for condensate evaporation that reduces the need of floor drains or electric heaters.

#### **NON-REFRIGERATED OPTION**

The new RDCH line offers the flexibility to convert into a dry case, allowing it to adapt perfectly to your specific needs.

#### **OPERATION TEMPERATURE**

Medium Temp: 34°F to 40°F.

Dimensions		Levels	HP	Voltage	NEMA	Amps	Crated	Refrigerant	
W	D	Н	Levels		Voltage	Config	Anips	Weight	Kenngerunt
73.8"	33.7"	50.1"	2	1/4+	120	5-15P	5	675 lbs	R-290
1875 mm	856 mm	1273 mm	Net Capac	Net Capacity (cf): 21 Energy Consumption: 6.32 kWh/24 h					11 200

MAES

\*Inches rounded up one decimal place. \*Specifics may change without notification.



## **REFRIGERATED DELI CASE**

# **RDCH-6**

#### **CABINET CONSTRUCTION**

- •High-density, CFC-Free, polyurethane insulation.
- •Curved glass.
- •Exterior: Galvanized metal cabinet with powder coated painted surface.
- Interior: Easy to clean pre-painted steel.
  Stainless steel bottom.
- •Built-in power outlet for scale.
- •Non-refrigerated variant with integrated switch.
- •Rated for open food.

#### DOOR

•Removable sliding glass doors.

#### SHELVING

- •Dimensions per level: 67.8" W x 15" D.
- •6 adjustable, black powder-coated wired shelves.

#### **OPERATING CONDITIONS**

- •The unit is best suited for an environment where temperatures remain below 75°F and humidity does not exceed 55%.
- •Areas with direct sunlight should be avoided.

#### ELECTRICAL

•110/120 standard volt system.

### system.

5-15P PLUG

#### LIGHTING

•LED interior lighting.

#### REFRIGERATION

- •R-290 refrigerant.
- •Maintenance free condenser.
- •Hot gas heated condensation pan.
- •Electronic temperature control.
- •Reverse cycle defrost system.
- •Easy to reach components for maintenance.

#### ACCESSORIES

- •Cutting board top. •3" or 5" casters (6 required). •6" stainless steel legs.
- •Custom graphics.




#### 3"/5" CASTERS

# 6" STAINLESS STEEL LEGS





## DIMENSIONAL DRAWING

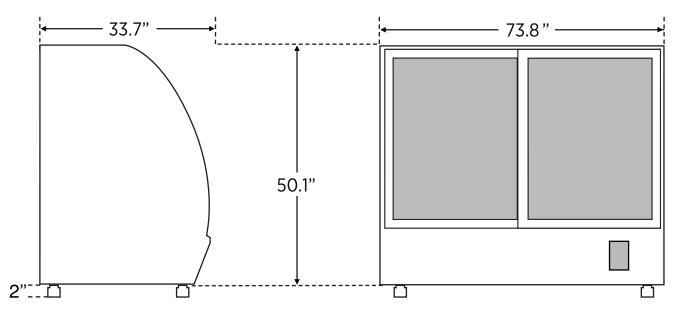

ANAFEM

MAES

\*Inches rounded up one decimal place. \*Specifics may change without notification.

