

## OPEN MERCHANDISERS OS35E SERIES STRAIGHT & CURVED 44" H - MULTI-PURPOSE



| STRAIGHT SIDES<br>MODEL NO. | DESCRIPTION    | DEPTH | LENGTH | HEIGHT | VOLTAGE | AMPS | HP/<br>BTUS | POWER<br>CORD | EST. SHIP<br>WEIGHT |
|-----------------------------|----------------|-------|--------|--------|---------|------|-------------|---------------|---------------------|
| SC-OS35E-3                  | Self contained | 34.5" | 39"    | 44"    | 115     | 12.0 | 1/2         | 5-15P         | 463                 |
| SC-OS35E-4                  | Self contained | 34.5" | 51"    | 44"    | 115     | 13.1 | 1/2         | 5-20P         | 494                 |
| SC-OS35E-5                  | Self contained | 34.5" | 63"    | 44"    | 115     | 16.0 | 3/4         | 5-20P         | 520                 |
| SC-OS35E-6                  | Self contained | 34.5" | 75"    | 44"    | 115     | 16.0 | 3/4         | 5-20P         | 546                 |
| <b>Remote</b>               |                |       |        |        |         |      |             |               |                     |
| R-OS35E-3                   | Remote         | 34.5" | 39"    | 44"    | 115     | 0.7  | 3658        | No            | 417                 |
| R-OS35E-4                   | Remote         | 34.5" | 51"    | 44"    | 115     | 1.4  | 4875        | No            | 445                 |
| R-OS35E-5                   | Remote         | 34.5" | 63"    | 44"    | 115     | 1.4  | 6096        | No            | 468                 |
| R-OS35E-6                   | Remote         | 34.5" | 75"    | 44"    | 115     | 1.4  | 7316        | No            | 492                 |
| <b>CURVED SIDES</b>         |                |       |        |        |         |      |             |               |                     |
| CURVED SIDES<br>MODEL NO.   | DESCRIPTION    | DEPTH | LENGTH | HEIGHT | VOLTAGE | AMPS | HP/<br>BTUS | POWER<br>CORD | EST. SHIP<br>WEIGHT |
| SC-OS35E-3C                 | Self contained | 34.5" | 39"    | 44"    | 115     | 12.0 | 1/2         | 5-15P         | 463                 |
| SC-OS35E-4C                 | Self contained | 34.5" | 51"    | 44"    | 115     | 13.1 | 1/2         | 5-20P         | 494                 |
| SC-OS35E-5C                 | Self contained | 34.5" | 63"    | 44"    | 115     | 16.0 | 3/4         | 5-20P         | 520                 |
| SC-OS35E-6C                 | Self contained | 34.5" | 75"    | 44"    | 115     | 16.0 | 3/4         | 5-20P         | 546                 |
| <b>Remote</b>               |                |       |        |        |         |      |             |               |                     |
| R-OS35E-3C                  | Remote         | 34.5" | 39"    | 44"    | 115     | 0.7  | 3658        | No            | 417                 |
| R-OS35E-4C                  | Remote         | 34.5" | 51"    | 44"    | 115     | 1.4  | 4875        | No            | 445                 |
| R-OS35E-5C                  | Remote         | 34.5" | 63"    | 44"    | 115     | 1.4  | 6096        | No            | 468                 |
| R-OS35E-6C                  | Remote         | 34.5" | 75"    | 44"    | 115     | 1.4  | 7316        | No            | 492                 |

**(ALL WHITE OR ALL BLACK, NO EXTRA CHARGE—IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY)**

| Prefix              | Suffix              |
|---------------------|---------------------|
| SC = Self Contained | B = Black           |
| R = Remote          | W = White           |
|                     | S = Stainless Steel |
|                     | LED = LED lighting  |

- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
- Cases are equipped with drains; check your local building codes for connection requirements.
- Specification subject to change without notice



Howard McCray • 831 East Cayuga St • Philadelphia, PA 19124 USA • (215) 464-6800  
1-800-344-8222 • Fax (215) 969-4890 • E-Mail: sales@howardmccray.com • www.howardmccray.com

## OS35E SERIES STRAIGHT & CURVED 44" H – MULTI-PURPOSE

### STANDARD SPECIFICATIONS AND OPTIONAL FEATURES

#### CONSTRUCTION

- UL Classified to ANSI/NSF 7
- Foamed in place CFC free foam
- Heavy gauge steel super structure
- Multi deck
- Endless design allows for continuous line up

#### INTERIOR

- White, black, or stainless steel end panels
- Removable white, black, or stainless steel floor pans
- White, black, or stainless steel perforated rear wall (for even air distribution)
- Step shelves
- Condensate pan

#### EXTERIOR

- White, black, or stainless steel ends and front
- White, black, or stainless steel color band
- Removeable front grill allows for cleaning and servicing
- 1" bumper
- Choice of end panels Curved or Straight plexi
- Night Covers Standard

#### FINISHES

- White, black, or stainless steel exterior
- White, black, or stainless steel interior
- Laminate exterior
- Custom paint exterior

#### ELECTRICAL REQUIREMENTS

- Cord and Plug
- 3' 115V, 5-15P,
- 4'-5'-6' 115V, 5-20P,
- See Tech page for details on voltage

#### REFRIGERATION

- Low velocity fans located below deck area (to insure even flow of air)
- Electronic Control System with automatic air defrost to Maintain Balanced Temperatures
- New high efficiency air screen technology
- Self contained system
- Copeland hermetic unit
- Remotes available

#### OPTIONAL FEATURES

- LED lights at top of the unit
- Security cover (Straight)
- Insulated divider for line ups
- Plexiglas divider for line ups
- Colored bumper
- 2 Different end panel choices
- Digital thermometer

#### Important Note:

**All refrigerated cases are designed to operate in an environment of 75 degrees and 55% relative humidity.**

**Product must be cooled before being displayed within the case.**

**DRAIN IS REQUIRED**

## OS35E SERIES STRAIGHT & CURVED 44" H – MULTI-PURPOSE

### TECHNICAL DATA


| Straight Side Model No.    |             | SC-OS35E-3<br>R-OS35E-3<br>SC-OS35E-3C<br>R-OS35E-3C | SC-OS35E-4<br>R-OS35E-4<br>SC-OS35E-4C<br>R-OS35E-4C | SC-OS35E-5<br>R-OS35E-5<br>SC-OS35E-5C<br>R-OS35E-5C | SC-OS35E-6<br>R-OS35E-6<br>SC-OS35E-6C<br>R-OS35E-6C |
|----------------------------|-------------|------------------------------------------------------|------------------------------------------------------|------------------------------------------------------|------------------------------------------------------|
| Curved Side Model No.      |             |                                                      |                                                      |                                                      |                                                      |
| Length with (2) ends       |             | 39"                                                  | 51"                                                  | 63"                                                  | 75"                                                  |
| Length without ends        |             | 36"                                                  | 48"                                                  | 60"                                                  | 72"                                                  |
| Height with ends           |             | 44"                                                  | 44"                                                  | 44"                                                  | 44"                                                  |
| Height without ends        |             | 43-7/8"                                              | 43-7/8"                                              | 43-7/8"                                              | 43-7/8"                                              |
| Depth with ends            |             | 34-1/2"                                              | 34-1/2"                                              | 34-1/2"                                              | 34-1/2"                                              |
| Depth without ends         |             | 34"                                                  | 34"                                                  | 34"                                                  | 34"                                                  |
| Endless design             |             | YES                                                  | YES                                                  | YES                                                  | YES                                                  |
| (Dimensions are +/- 1/4")  |             |                                                      |                                                      |                                                      |                                                      |
| Operating temperature      |             | 36°F to 40°F                                         | 36°F to 40°F                                         | 36°F to 40°F                                         | 36°F to 40°F                                         |
| Compressor size HP         | SC          | 1/2                                                  | 1/2                                                  | 3/4                                                  | 3/4                                                  |
| Defrost                    | Air Defrost | Electronic controlled                                | Electronic controlled                                | Electronic controlled                                | Electronic controlled                                |
| Defrost per day            | R.          | 6 per day                                            | 6 per day                                            | 6 per day                                            | 6 per day                                            |
| BTU's at +20°F Evap. Temp. | R           | 3658                                                 | 4875                                                 | 6096                                                 | 7316                                                 |
| Voltage                    | SC          | 115                                                  | 115                                                  | 115                                                  | 115                                                  |
| Amperage                   | SC          | 12.0                                                 | 13.1                                                 | 16.0                                                 | 16.0                                                 |
| Remote Voltage             | R           | 115                                                  | 115                                                  | 115                                                  | 115                                                  |
| Amperage, lights only      | R           | 0.7                                                  | 1.4                                                  | 1.4                                                  | 1.4                                                  |
| Cord and plug              | SC          | 5-15P                                                | 5-20P                                                | 5-20P                                                | 5-20P                                                |
|                            | R           | NO                                                   | NO                                                   | NO                                                   | NO                                                   |
| Exterior color             |             | W, B, S                                              | W, B, S                                              | W, B, S                                              | W, B, S                                              |
| Interior color             |             | W, B, S                                              | W, B, S                                              | W, B, S                                              | W, B, S                                              |
| Shelves                    |             | Step shelf<br>(2) 8.25" depth                        | Step shelf<br>(2) 8.25" depth                        | Step shelf<br>(2) 8.25" depth                        | Step shelf<br>(2) 8.25" depth                        |
| Shipping Info              |             |                                                      |                                                      |                                                      |                                                      |
| Height                     |             | 54"                                                  | 54"                                                  | 54"                                                  | 54"                                                  |
| Depth                      |             | 44"                                                  | 44"                                                  | 44"                                                  | 44"                                                  |
| Length                     |             | 61"                                                  | 61"                                                  | 87"                                                  | 87"                                                  |
| Gross weight SC/R          |             | 463/417                                              | 494/445                                              | 520/468                                              | 546/492                                              |
| Cubic feet                 |             | 75                                                   | 75                                                   | 75                                                   | 75                                                   |

- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
- Cases are equipped with drains; check your local building codes for connection requirements.
- Specification subject to change without notice

## OPEN MERCHANDISERS OS35E SERIES STRAIGHT & CURVED 44" H - MULTI-PURPOSE

### DRAWINGS • SIDE VIEW • PLAN VIEW



#### CURVED SIDES

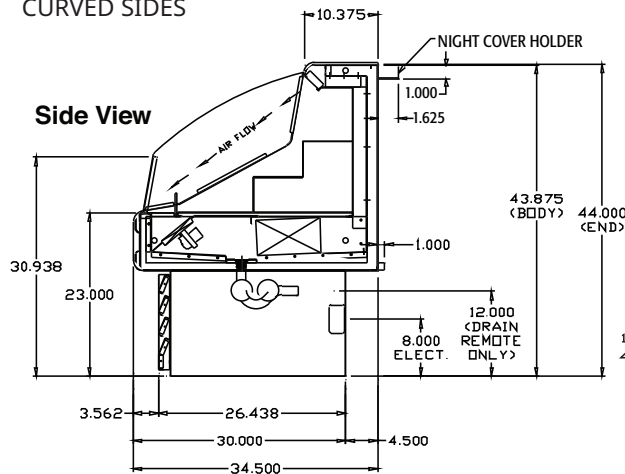


3'

SC - PLAN VIEWS

4'

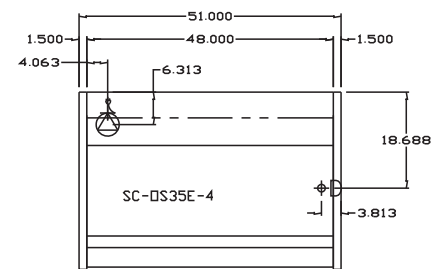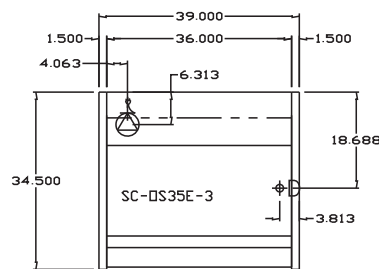





#### STRAIGHT SIDES SIDE VIEW

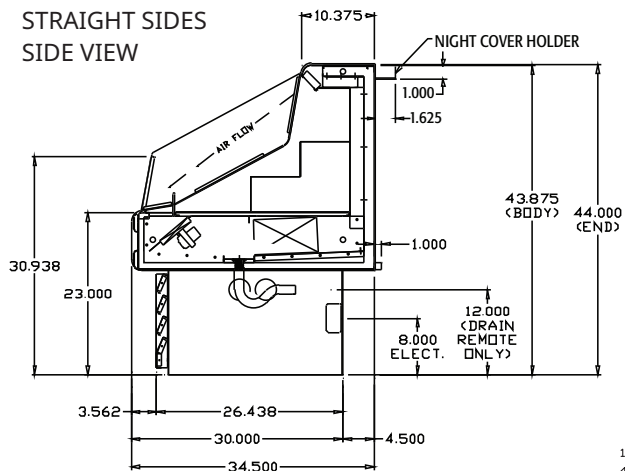

5'

REMOTE - PLAN VIEWS

6'

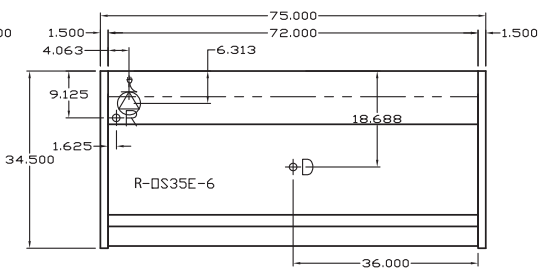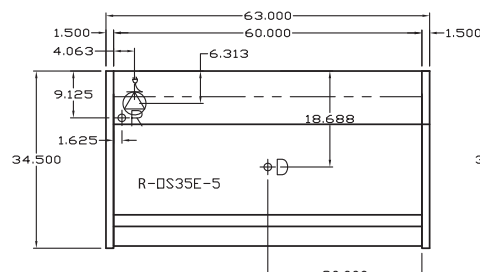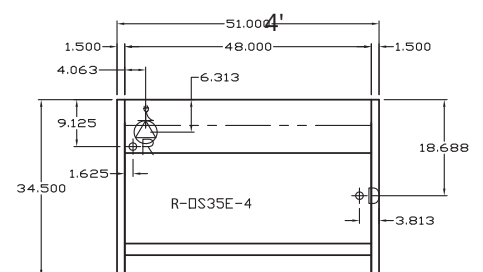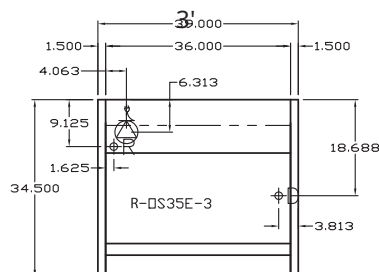

5'

6'