

BGR-6B-G24

GAS RANGE 6 BURNERS + 24" GRIDDLE

ROBUST DESIGN HIGH QUALITY STAINLESS STEEL





Optional caster wheels

Stainless steel tubing for burners and pilot

Stainless steel exterior including front, sides, kick plate, back guard & over shelf

Heavy duty 12" X 12" removable cast iron top grates

Oven Temperature range between 175° & 500°F

Oven cooking area: 26(w) x 26(b) x 15(h)

Two (2) chrome oven rack per oven standard; 4 position oven rack guides.

Enamel interior oven for easy cleaning, with full width stainless steel crumb tray.

Fits bun pans either widthwise or lengthwise.

Dimensions (w×d×h) 60" × 311/2" × 56"

Cooking Area (wxd) 36"X24"(HOT PLATES) 24"X20"(GRIDDLE)

Oven size (w×d×h) 26" × 26" × 15" (each)

Burners LPG/NG: 2 x 35,000 BTU/H (oven)

Burners LPG/NG: 2 x 35,000 BTU/H(OVEN)

LPG: 6 x 30,000 BTU/H (GRIDDLE)

NG: 6 x 33,000 BTU/H (HOT PLATES)

LPG TOTAL: 306K NG TOTAL: 324K



BGR-6B-G24

DELIVERY

Box dimensions (w×d×h)

62" x 31^{4/5}" x 38^{1/5}"

Weight

net: 626 lbs **ship**: 745 lbs

GAS POWERED

Natural Source Propane

10"WC 5"WC **Pressure**

38# **Nozzle** (oven) 49#


41# **Nozzle** (нот р.) 52#

43# **Nozzle**(griddle) 53#


3/4" NPT Connection 3/4" NPT

if to be used above 2000 ft, specify altitude and gas type when ordering


TOP VIEW

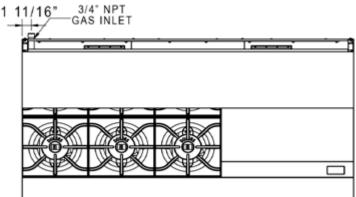

SIDE VIEW

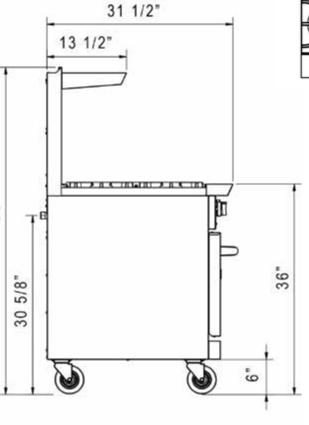

FRONT VIEW



SEMBLY/SUPPORT



MORE PRODUCTS



SAFETY

Keep combustibles a minimum of 17" away from the equipment. Keep a clearance of 4" at the rear.

■ We're on social media!



1.800.567.3620 | WWW.BRIKAEQUIPMENT.CA