



BGR-4B-G36

GAS RANGE 4 BURNERS + 36" GRIDDLE

**ROBUST DESIGN
HIGH QUALITY STAINLESS STEEL**



Stainless steel tubing for burners and pilot

Stainless steel exterior including front, sides, kick plate, back guard & over shelf

Heavy duty 12" X 12" removable cast iron top grates

Oven Temperature range between 175° & 500°F

Oven cooking area: 26"_[w] x 26"_[d] x 15"_[h]

Two (2) chrome oven rack per oven standard; 4 position oven rack guides.

Enamel interior oven for easy cleaning, with full width stainless steel crumb tray.

Optional castor wheels

Fits bun pans either widthwise or lengthwise.

Dimensions (wxdxh) 60" x 31 1/2" x 56"

Cooking Area (wxd) 24"x24"_(HOT PLATES) 36"x20"_(GRIDDLE)

Oven size (wxdxh) 26" x 26" x 15" (each)

Burners LPG/NG: 2 x 35,000 BTU/H _(OVEN)

LPG/NG: 3 x 28,000 BTU/H _(GRIDDLE)

LPG: 4 x 30,000 BTU/H _(HOT PLATES)

NG: 4 x 33,000 BTU/H _(HOT PLATES)

LPG TOTAL: 274K NG TOTAL: 286K

BGR-4B-G36

DELIVERY

Box dimensions (w×d×h)

62" x 36^{4/5}" x 38^{1/5}"

Weight

net: 643 lbs

ship: 762 lbs

GAS POWERED

Natural **Source** Propane
5"WC **Pressure** 10"WC

38# **Nozzle** (OVEN) 49#


41# **Nozzle** (HOT P.) 52#

43# **Nozzle** (GRIDDLE) 53#


3/4" NPT **Connection** 3/4" NPT

if to be used above 2000 ft, specify altitude and gas type when ordering


TOP VIEW

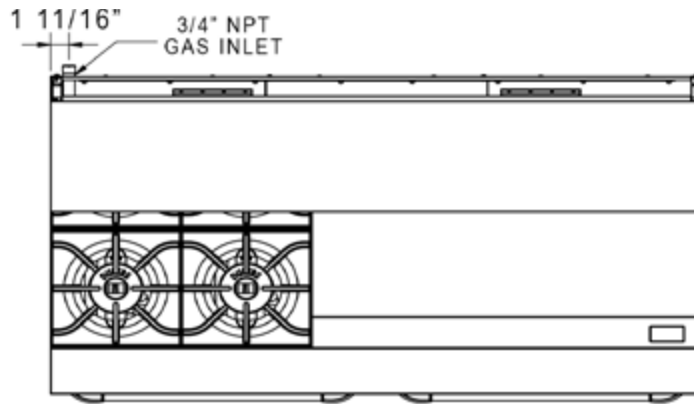

SIDE VIEW

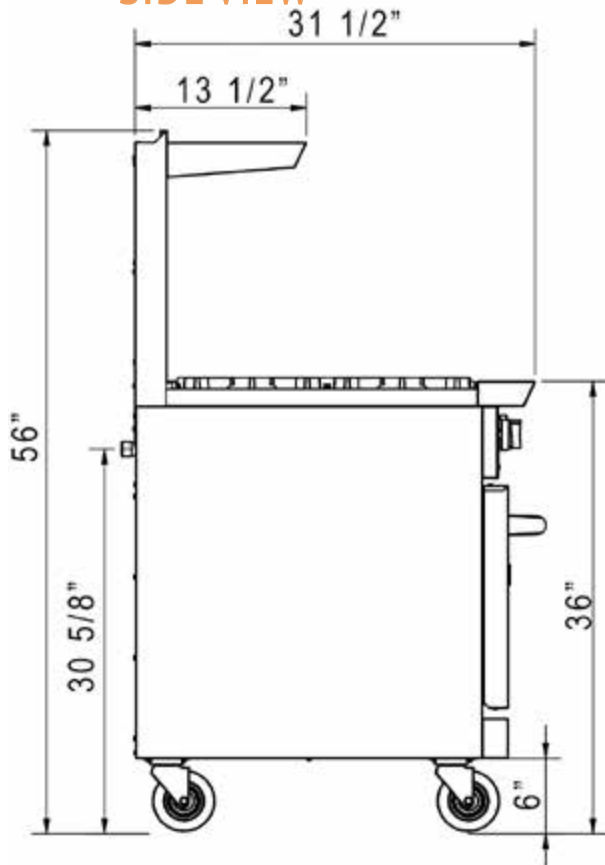

FRONT VIEW

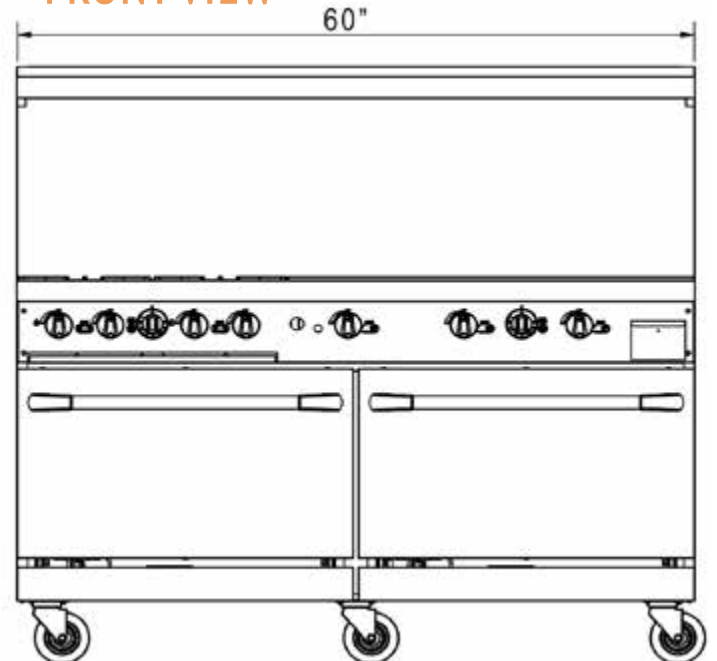

ASSEMBLY/SUPPORT



MORE PRODUCTS



SAFETY

Keep combustibles a minimum of 17" away from the equipment. Keep a clearance of 4" at the rear.

 We're on social media! 

1.800.567.3620 | WWW.BRIKAEQUIPMENT.CA